
# Your agent updates live on connect and disconnect


Checked on pnpm dev (through the Vite proxy) and the Docker image, demo workspace, owner@example.com. A scripted OAuth agent connected and then disconnected as the same person from outside the browser; the open page was never focused or reloaded.

- Stream through the dev proxy and the image: opens at once; the nudge for Allow and for Disconnect each arrive within about 100 ms.
- Browser: the page shows "Claude Code is connected. Nice." within a second of Allow, and "You disconnected Claude Code." within a second of Disconnect; the menu dot follows.
- Server stop with a stream open: 0.4 s.
- Not covered: a deployed ingress, real Claude/ChatGPT clients, password reset in the browser.

## Connected, live

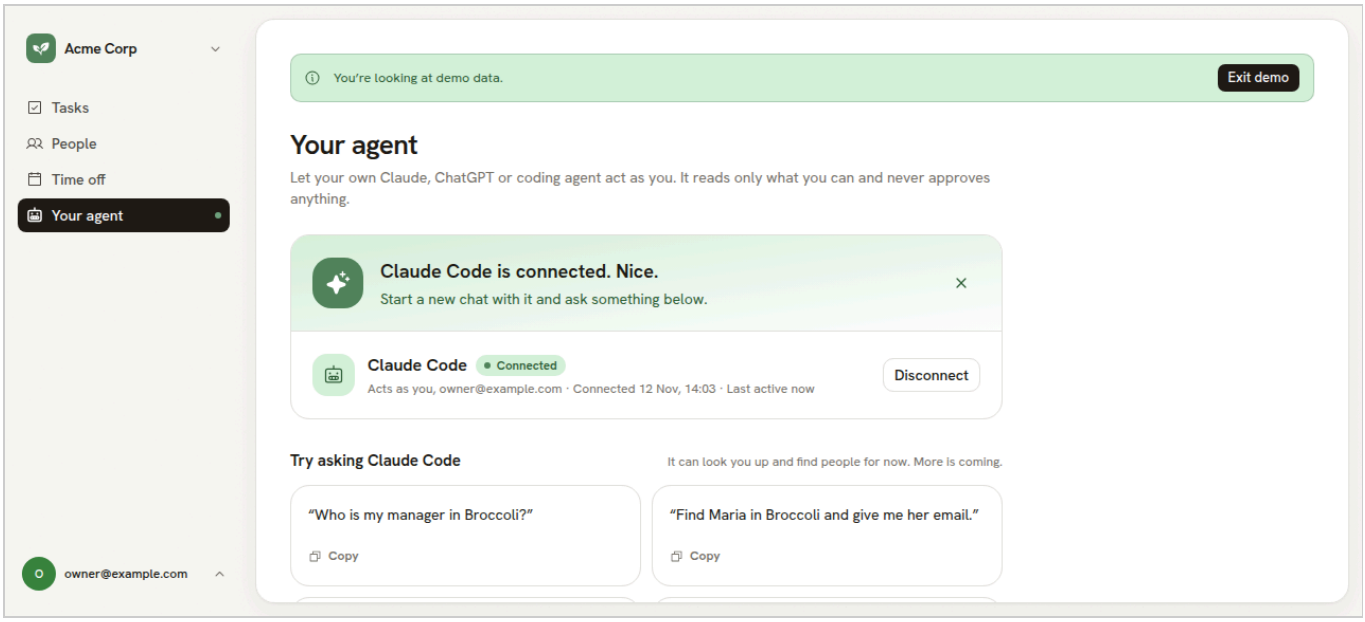


## Disconnected, live

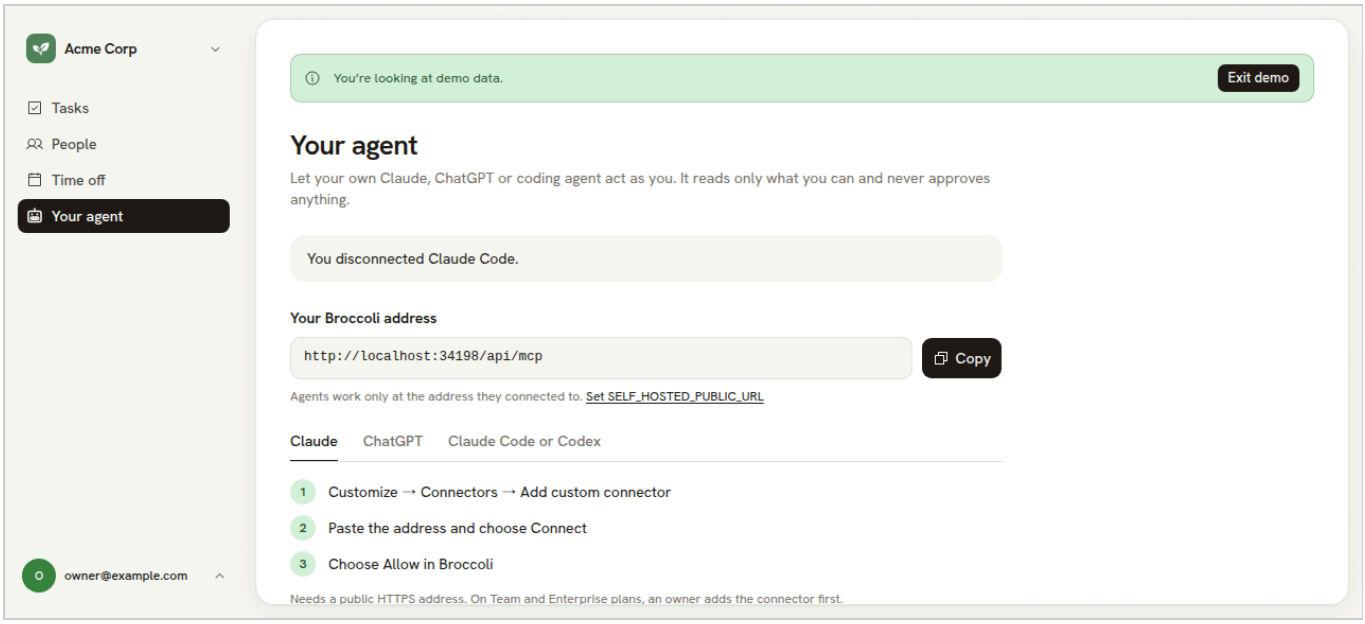
Acme Corp
Tasks
People
Time off
Your agent
owner@example.com
You're looking at demo data.
Exit demo
Your agent
Let your own Claude, ChatGPT or coding agent act as you. It reads only what you can and never approves anything.
You disconnected Claude Code.
Your Broccoli address
http://localhost:34198/api/mcp
Copy
Agents work only at the address they connected to. Set SELF_HOSTED_PUBLIC_URL
Claude
ChatGPT
Claude Code or Codex
1 Customize → Connectors → Add custom connector
2 Paste the address and choose Connect
3 Choose Allow in Broccoli
Needs a public HTTPS address. On Team and Enterprise plans, an owner adds the connector first.